

# CRUX SURFACE APPLIQUE

LED's luminaire for 220-240V 50/60Hz supply tension

## Led power & output - Tc 25°C

15W - 4000K - **2145 lm** - 200-240V 50Hz  
 15W - 3000K - **1914 lm** - 200-240V 50Hz  
 25W - 4000K - **3311 lm** - 200-240V 50Hz  
 25W - 3000K - **3113 lm** - 200-240V 50Hz

## Luminaire power & output - Ta 25°C

17.3W - 4000K - **1950 lm** - 200-240V 50Hz  
 17.3W - 3000K - **1740 lm** - 200-240V 50Hz  
 28.8W - 4000K - **3010 lm** - 200-240V 50Hz  
 28.8W - 3000K - **2830 lm** - 200-240V 50Hz



## Technical details

- Ceiling lamp for wall and ceiling mounting
- Driver included
- A2 stainless steel screws

## Wiring

- LED's
- With motion sensor
- Selectable colour temperature (3000K - 4000K - 5700K)

## Housing

- PC (polycarbonate) 94-V0 housing white colour RAL 9003

Step MacAdam 2  
 Lifetime: 30Kh



Surface installation



Ceiling installation



Protection degree IP40



Impact resistance IK06




Year warranty




Photobiological risk



Colour rendering index

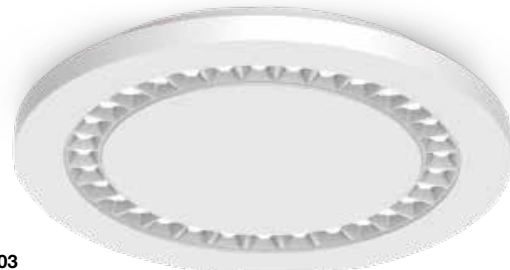


White RAL 9003

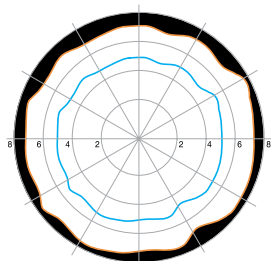

Ceiling mounting

Unit: mt

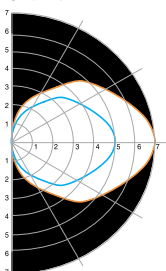

Wall mounting

Dimensions	Power	White RAL 9003
Ø300x33mm	15W 4000K 2145 lm	0701.182B
	15W 3000K 1914 lm	0701.184B
Ø400x33mm	25W 4000K 3311 lm	0701.282B
	25W 3000K 3113 lm	0701.284B

### MOTION SENSOR

Dimensions	Power	White RAL 9003
Ø300x33mm	15W 4000K 2145 lm	0701.17AB
	15W 3000K 1914 lm	0701.17BB
Ø400x33mm	25W 4000K 3311 lm	0701.27AB
	25W 3000K 3113 lm	0701.27BB

### SELECTABLE COLOUR TEMPERATURE 3000K - 4000K - 5700K

Dimensions	Power	White RAL 9003
Ø300x33mm	15W	0701.18RB
Ø400x33mm	25W	0701.28RB

